

TECHNICAL DATA SHEET

ITM WITH POST


TDS40



CHECKLINE II

SAFETY BY DESIGN

Checkmate Checkline II ITM Bracket with Post
The ITM (Intermediate Bracket) is mounted onto the TopFix post and is used to support the 8mm wire rope. The special rubber dampers are energy absorbing and will reduce the impact forces by up to 67% in the event of a fall. This bracket has the ability to be rotated through 180° and set at intervals of 30°.

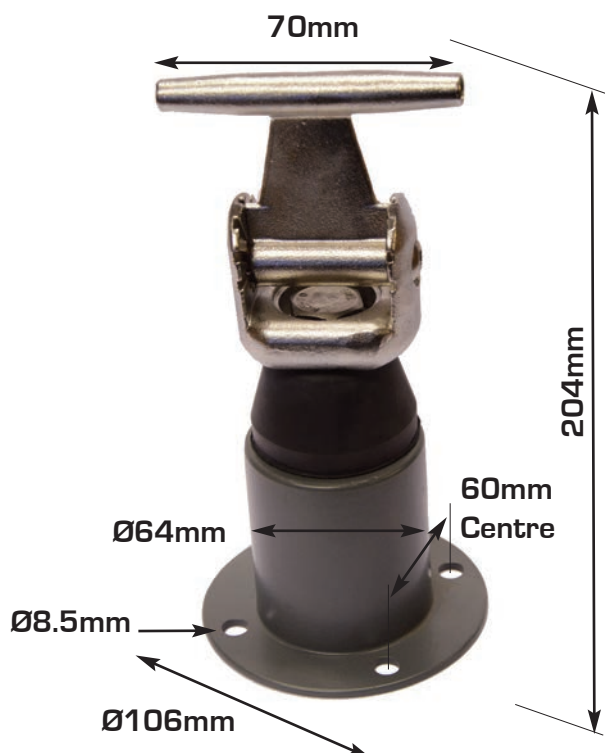

principal materials

- ▼ **Body**
Cast Stainless Steel - Powder Coated Grey
- ▼ **Intermediate Bracket**
Cast Stainless Steel - Electro Polished
- ▼ **Damper**
Rubber EPDM
- ▼ **M16 Hex Bolt**
Stainless Steel
- ▼ **Sealing Gasket (if required)**
Neoprene

standards

- ▼ These components form part of the Checkmate EN795 system.

ordering information

| Part No. | Description | Weight |
|--------------|-----------------------------|--------|
| ▼ PPESLL-501 | ITM Bracket c/w TopFix Post | 1.35kg |

DISCLAIMER – COMPONENTS MUST BE USED AS PART OF A COMPLETE CHECKMATE CHECKLINE SLL SYSTEM, COMPRISING OF CHECKMATE COMPONENTS ONLY. STRUCTURAL ENGINEER APPROVAL IS REQUIRED BY BUILDING OWNER. SPECIFYING AND INSTALLING CHECKLINE REQUIRES TRAINING AND WRITTEN APPROVAL FROM CHECKMATE – CONTACT CHECKMATE FOR DETAILS.



CHECKUSOUT

www.checkmateuk.com

